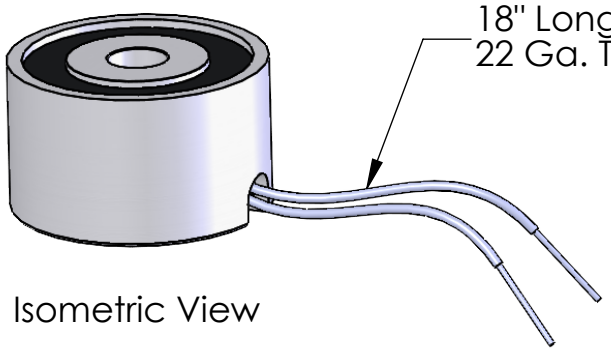

Isometric View

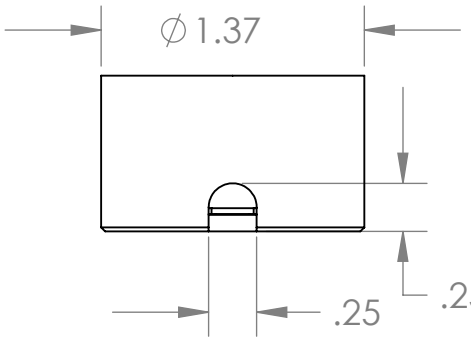

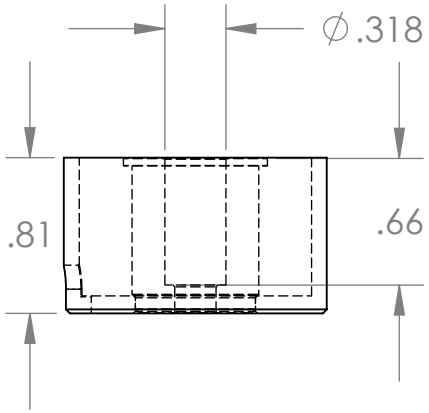

Electrical Specifications

Voltage:	24 VDC
Duty Cycle:	Continuous
Resistance:	165 ohms ± 10% (@ 20c)
Amps @ rated Volts:	0.21
Watts @ rated Volts:	5.0
Holding:	44 lbs (1/4" Thick 1215 CRS @ 20c)
Operating Temp:	-40c to 60c (range)

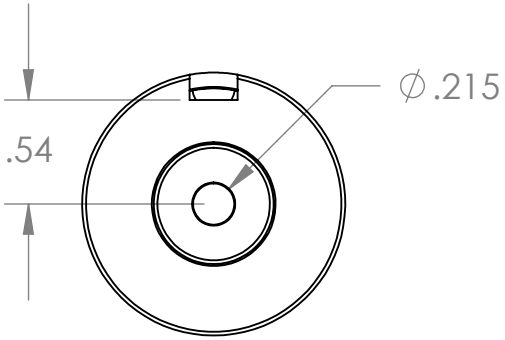

Additional Components

Screw:	10-32 x 13/16" Long (Hex Socket Head Cap) w/Nylok
Spring:	N/A
Spiral Pin:	N/A
Potting:	United Resin Corp. (El-cast Black)
Finish:	Housing - Zinc or Electroless Nickel Plating (0.0002-0.0003")

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF APW COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF APW COMPANY IS STRICLY PROHIBITED.

Client	Client P/N
NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± .010
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±.010
THREE PLACE DECIMAL ±.005

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	J.K.	01.22.13
CHECKED	C.Z.	01.22.13
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

APW COMPANY

TITLE:

P/N: EM137-24-212

SIZE	DWG. NO.	REV
A	6560	

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1

5 4 3 2 1